






NWD601

THREE FUNCTIONS ELECTRIC BED

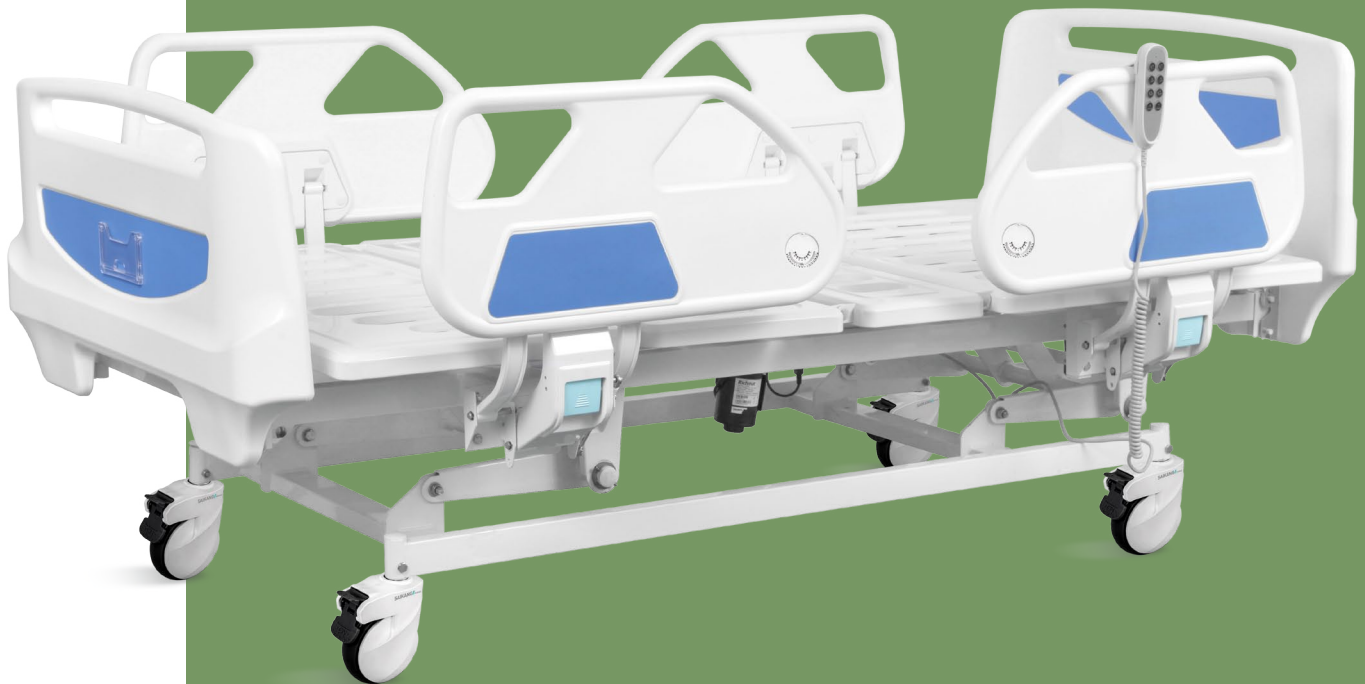

NWD601

FEATURES AND HIGHLIGHTS



Technical parameters

▪ External size (LxW):	2170x1060 mm
▪ Mattress platform:	1925x900 mm
▪ Safe working load:	250 kg
▪ Height adjustment:	435-745 mm
▪ Back-rest adjustment:	0-75° (±10°)
▪ Knee-rest adjustment:	0-35° (±10°)
▪ Angle indicator:	0-90°
▪ Voltage and frequency:	100-240 V · 50/60 Hz
▪ Plug as required (hospital grade)	



Technical configuration

<input checked="" type="checkbox"/> Linear Motor	3 pcs
<input checked="" type="checkbox"/> Hand Controller	1 pc
<input checked="" type="checkbox"/> 5" Hardshell Castors	4 pcs
<input checked="" type="checkbox"/> ABS Side Rail Extra Height	1 set
<input checked="" type="checkbox"/> ABS Bed Ends with Safe Lock	1 set
<input checked="" type="checkbox"/> IV Pole	1 set
<input checked="" type="checkbox"/> IV Pole Prevision	4 pcs
<input checked="" type="checkbox"/> Drainage Hook	2 pcs



Optional

<input type="checkbox"/> Manual CPR	
<input type="checkbox"/> Electric CPR	
<input type="checkbox"/> Back-up Battery	
<input type="checkbox"/> X-ray Bed Surface	
<input type="checkbox"/> Monkey Pole	
<input type="checkbox"/> Balkan Traction Frame	
<input type="checkbox"/> Directional Wheel	





Design

E-shaped large guardrail, with angled display and built-in controller, meets safety standards, providing comforting feeling for patients.



Steels | Painting

Baosteel from Fortune Global 500. 11 Process epoxy painting, ASTM testing anti-bacterial, paint thickness 0.12 mm, brightness 60°, paint can resist 50kg impact.



Welding | Chassis

Panasonic robotic ensure, 360° full smooth wedding. Solid bed base made of 5.0 mm stamped rotating plate.




Electric Motor

Linear motor, with UL/ROHS/EN standard. Noise under 50 dB, with lifetime 20,000 times movement.



Virgin ABS

Environmental plastic can be sterilized in 100°C, tensile upto 30MPa.

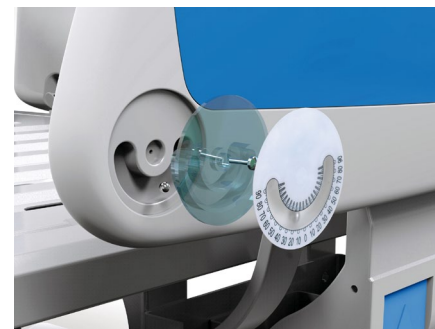

Angle Indicator

Patented angle indicator.



Bed Surface

Stamping forming platform, smooth surface no welding scar, bearing 250 kg load. Option ABS platform and resin X-ray translucent platform.



Side Rail

Full ABS material, tuck away side rail with built-in controller. From top of the guardrail to bed surface is about 345mm, more height provides better protection for patient. Buttom can endure 100,000times press, buffer, built-in angle indicator.



Head & Foot Board

Full ABS material, Buttom can endure 100,000 times press
Head and foot board can be reversable.



Wheels

TPR tire no worn out after running 30KM, save anti-winding hard shell, united forming without bolts.
Pass Dynamic test: Bearing 120kg run 30KM and pass obstacles 500time.



IV pole

Stainless Steel Column with plastic hook.



Drainage Hooks

Mobile plastic drainage hooks.



NUMBER WIN

MEDICAL TECHNOLOGY



7x24

Online 24 Hours for Sales Service
Timely Response for Clients' Problems

+86 18021231901

Suzhou Number Win Medical Technology Co.,Ltd.

No. 35, Lehong Road · Zhangjiagang (Jiangsu) · China

export@number-win.com

www.number-win.com

As the circumstance of printing, the photos might have minor difference on color, tactile from real products.
As the update of design and improvement, parameters and outlook of products might change, thanks for understanding.



Company video



General catalogue